


TS 80/100/41




TS 150/200/31

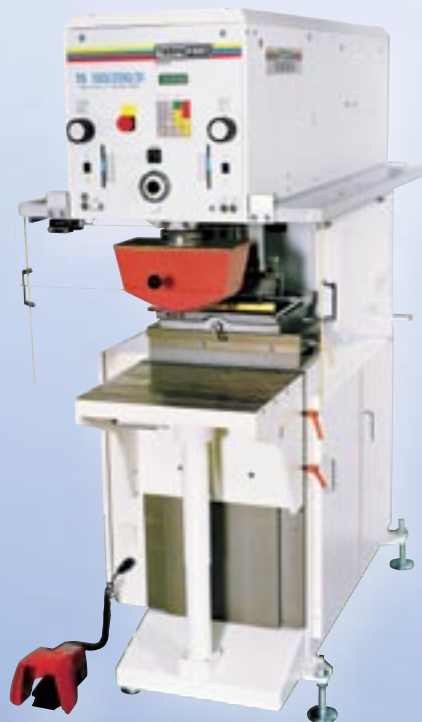

TS 125/41



TS 125/150/31

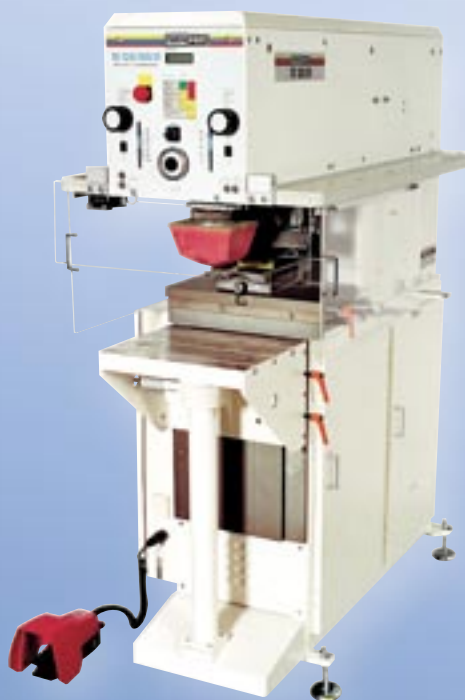

PURE TAMPON PRINTING

Tampon printing machines with an 'open' ink/doctoring system are available with a pneumatic or electromechanical drive. The full-featured ink/doctoring system permits a number of cliché sizes to be used. The cliché holders are adjustable as standard.

The clichés are inserted on the side of the ink well. If required, ink wells are also available which are closed on the side and fitted from the top.

All models are very accessible and are fitted with a height-adjustable angle table and a membrane keyboard.

Easy operation and individual setting of the machines is guaranteed.



1973

OPTIONS & FUNCTIONS




Cliché holder with accessories



Ink doctor blade, spatula, x-y adjustment



Cliché holder, spatula, ink doctor blade

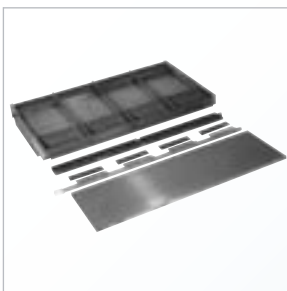

4-colour cliché holder



x-y cross table



TS 450/31 2-colour



TT/TS SERIES

TT / TS		TT/TS 80/100/41	TT/TS 125/41	TS 125/150/31	TS 150/200/31
Parts no.		01 00 07** (80 mm)	01 00 38**	01 01 25** (125 mm)	01 01 50** (150 mm)
Parts no. with extended doctoring stroke		01 02 07** (100 mm)		01 02 25** (150 mm)	01 02 50** (200 mm)
Cycles/hour	max.	400 - 1.500	200 - 1,200	600 - 1,800	600 - 2,000
Cliché size	mm	80 x 50-300	125 x 125-500	125 x 150-500	150 x 100-500
Cliché size with extended doctoring stroke	mm	100 x 50-350	-	150 x 150-500	150 x 100-550
Print image diameter	max. Ø	up to approx. 15-20 mm from the cliché edges possible			
Tampon stroke onto workpiece	mm	20-100	20-100	40-100	60-120
Tampon stroke onto cliché	mm	100	100	100	120
Tampon installation height	max. mm	110	120	132	206
Force of pressure	N	1,000	2,500	3,000	6,000
Drive		electro-pneum.	electro-pneum.	electro-pneum-mech.	electro-pneum-mech.
Connected load	kW	0.5	0.5	2.5	3.5
Power supply	V/phase	230 /single	230 /single	400 /3	400 /3
Control		PLC	PLC	PLC	PLC
Control voltage	V/DC	24	24	24	24
Pneumatic supply		6	6	6	6
Air consumption / cycle	NL	5	15	0.05	0.05
Width	mm	458	550	720	855
Depth	mm	TT 857/TS 948	1,120	1,290	1,450
Height	mm	*680 / 1,484**	*653 / 1,495**	1,615**	1,755**
Weight	kg	*90 / 160**	*140 / 200**	455**	850**

* TT = table model

** TS = stand model

